
KYOCERA

kyoceradocumentsolutions.com

KYOCERA Net Direct Print User Guide

2025.05
DirectPrintKDEN08

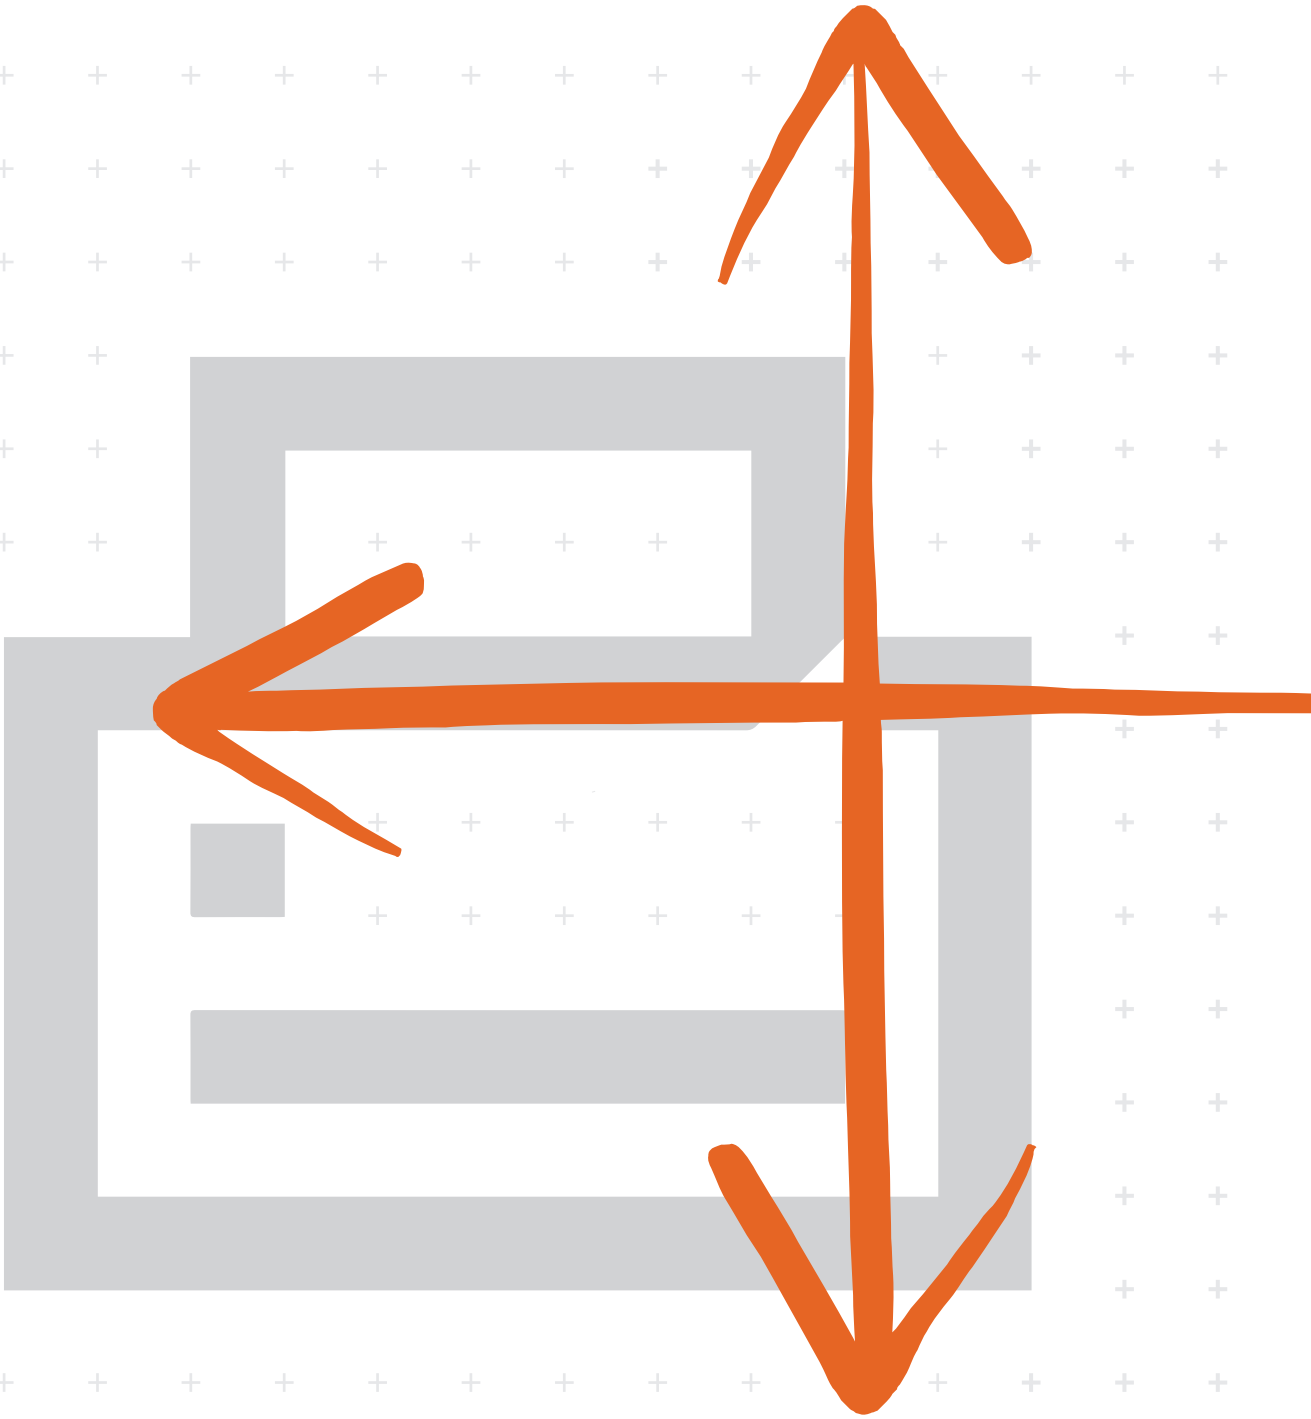

Legal and General Information

Notice

Unauthorized reproduction of all or part of this guide is prohibited. The information in this guide is subject to change without notice.

We cannot be held liable for any problems arising from the use of this product, regardless of the information herein.

When using this utility, the items that can be configured will differ depending on the model of your printing system or multifunctional printer (hereinafter referred to as "printing system").

Examples in this document are described in terms of the Windows 10 operating system environment.

Regarding Trademarks

KYOCERA is a registered trademark of Kyocera Corporation.

KIR (Kyocera Image Refinement) is a trademark of Kyocera Corporation.

Microsoft and Windows are registered trademarks of Microsoft Corporation in the U.S.A. and/or other countries.

Adobe, Acrobat, and Acrobat Reader are trademarks of Adobe Inc.

Pentium is a registered trademark of Intel Corporation.

Other brand and product names contained in this document are registered trademarks or trademarks of their respective companies.

Table of Contents

1. Features 1
1.1. What is KYOCERA Net Direct Print? 1
1.2. System Requirements 1
1.3. Support Language 1
2. Installation and Startup 2
2.1. Download and install from website 2
2.2. Download and install from website 4
2.3. Install from DVD 7
2.4. Startup 8
3. Printing PDF 9
4. Names and Functions 11
5. Printing System Settings 12
6. Detailed Settings 16

1. Features

1.1. What is KYOCERA Net Direct Print?

KYOCERA Net Direct Print is a utility that allows you to print PDF files downloaded from Internet such as catalog and documents without starting Adobe Acrobat/Acrobat Reader.

1.2. System Requirements

The KYOCERA Net Direct Print operates in the following environment. Verify your environment before installation.

Item	Description
OS (Depending on the model)	Microsoft Windows Server 2019/2022/2025† Microsoft Windows 10† Microsoft Windows 11†
Web Browser	Microsoft Edge
Hardware	A processor equivalent to a Pentium 200 MHz or greater At least 32 MB of free memory At least 4 MB of free hard disk space SVGA (800 × 600, 256 color) or greater

† Administrator rights are required for installation.

1.3. Support Language

KYOCERA Net Direct Print supports the following languages: Arabic, Brazilian Portuguese, Czech, Danish, Dutch, English, Finnish, Farsi, French, German, Hebrew, Hungarian, Italian, Japanese, Korean, Lithuanian, Norwegian, Polish, Portuguese, Russian, Simplified Chinese, Spanish, Swedish, Traditional Chinese and Turkish.

2. Installation and Startup

There are two ways to install KYOCERA Net Direct Print.

- Download and install the installer from the website
- Install from DVD


2.1. Download and install from website

1 Launch a web browser.


2 Enter "https://kyocera.info/support" to the browser's address bar or location bar.



3 Enter the product name to search and select the desired one from the list.

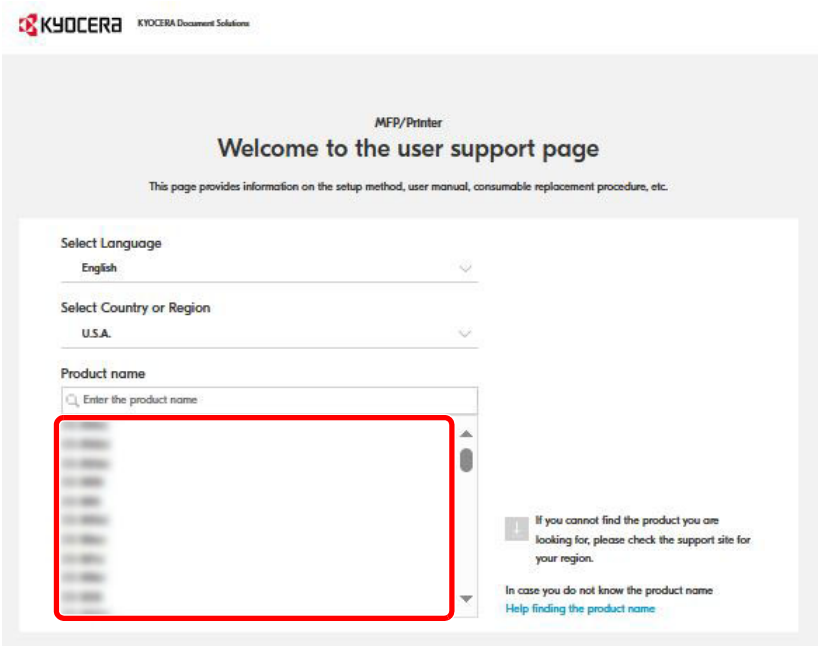


4 Download tab > Change the selected operating system setting as needed.

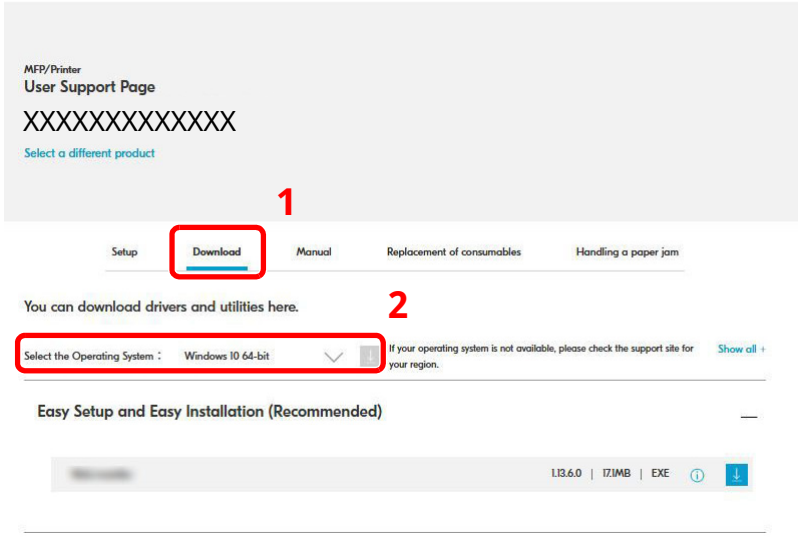

Note

- We recommend to install KX Printer Driver prior to install KYOCERA Net Direct Print. Scroll Driver tab > ⬇ of the KX Printer Driver. Read the license agreement and click [Agree to contract and download] if there is no problem. Unzip the downloaded file and double-click Setup.exe in the folder. Click [Express Install] to select the desired device and printer driver, and then select [Install].

5 Utility tab > ⬇ of the **KYOCERA Net Direct Print**.

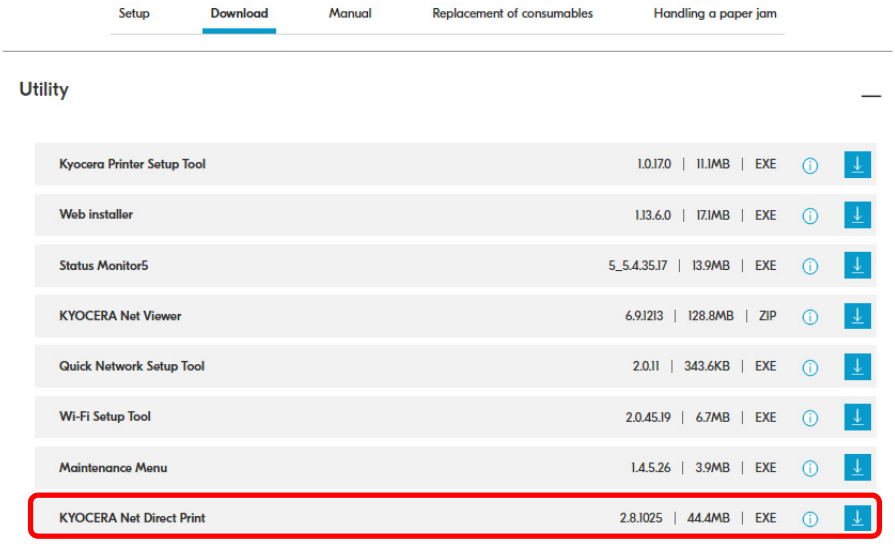

An installer of the selected software will be downloaded.

6 Double-click the downloaded installer to launch.

Follow the guidance on the screen to install the software.

Note


- Installation on Windows must be done by a user logged on with administrator privileges.

- If the user account management window appears, click [**Yes**] ([**Allow**]).


2.2. Download and install from website

1 Launch a web browser.


2 Enter "https://kyocera.info/support" to the browser's address bar or location bar.




3 Enter the product name to search and select the desired one from the list.

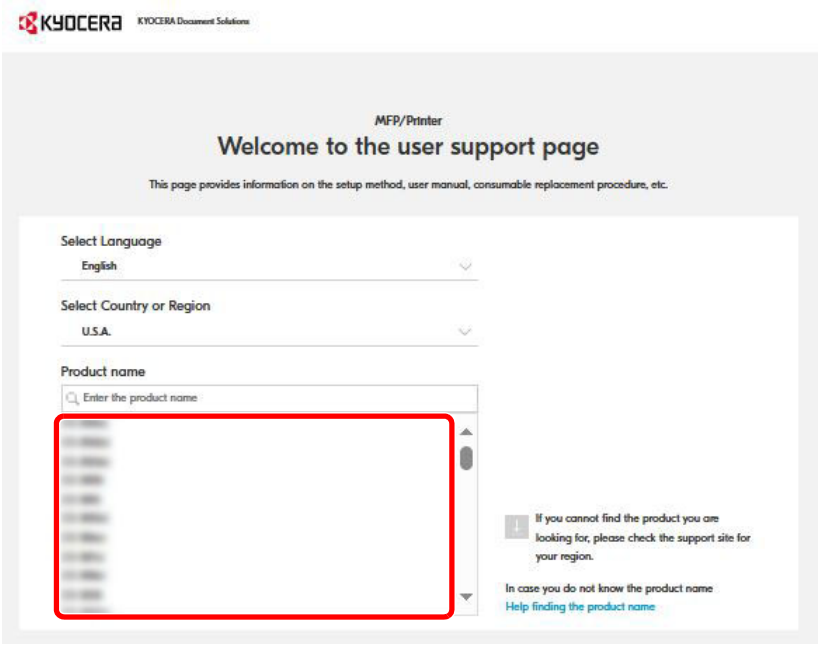

4 Download tab > Change the selected operating system setting as needed.

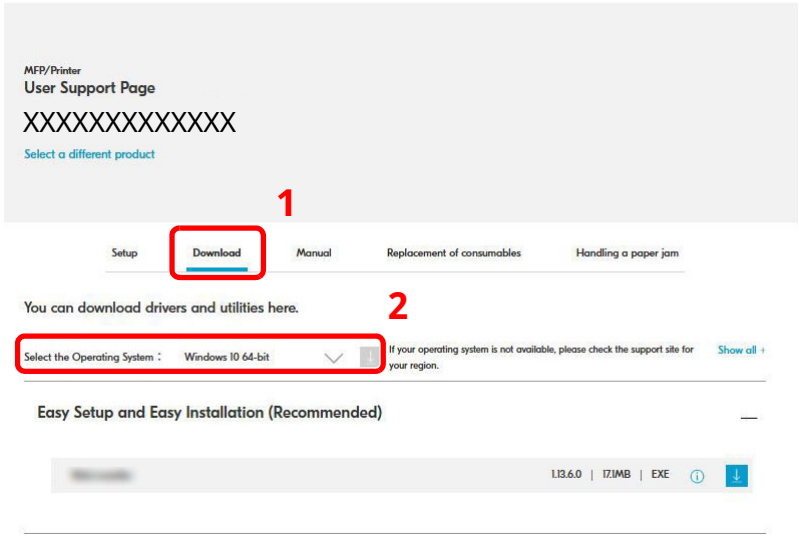

5 Utility tab > "Web installer" > 

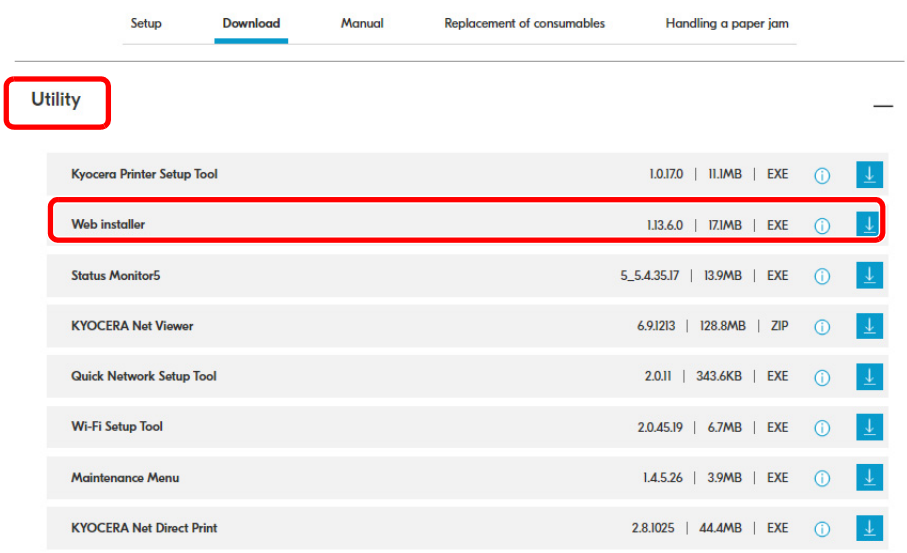

A web installer will be downloaded.


6 Double-click the downloaded installer to launch.

Follow the guidance on the screen to install the software.


Note

- Installation on Windows must be done by a user logged on with administrator privileges.
- If the user account management window appears, click [**Yes**] ([**Allow**]).


7 Read the license agreement and click [Accept] if there is no problem.

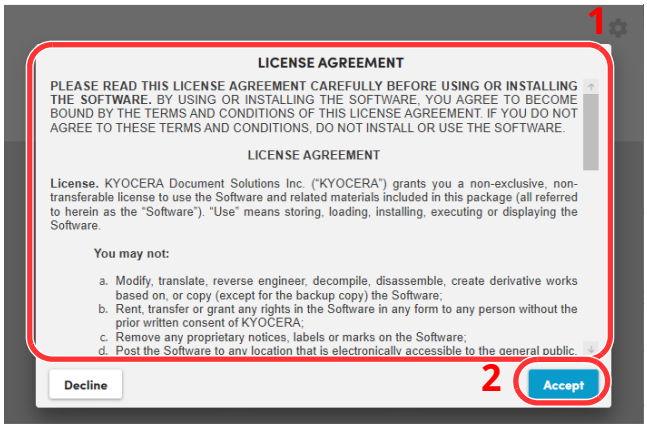

8 Click [Install].

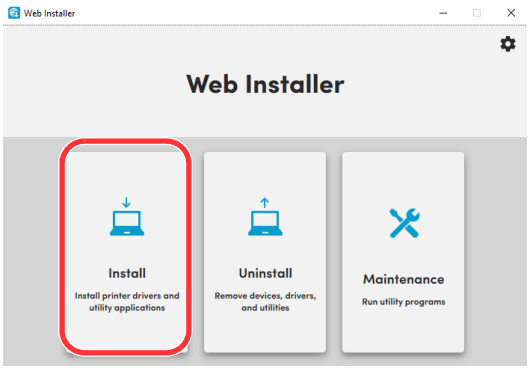

9 Select a model and click [Next].

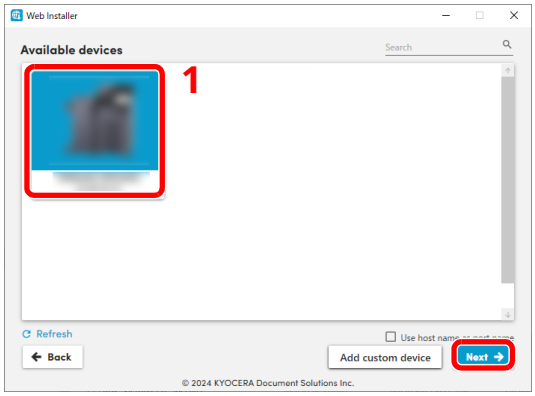


Note

- The machine cannot be detected unless it is on. If the computer fails to detect the machine, verify that it is connected to the computer via a network or USB cable.
- If a desired device is not displayed, select [Add custom device] to directly select the device you want to use.

10 Select **KX Printer Driver** and **KYOCERA Net Direct Print**.

Note

- The software that is recommended for installation has a check mark in the check box. Change it as necessary.
- You can select and install KYOCERA Net Direct Print by itself. However, we recommend that you first select and install the KX Printer Driver.

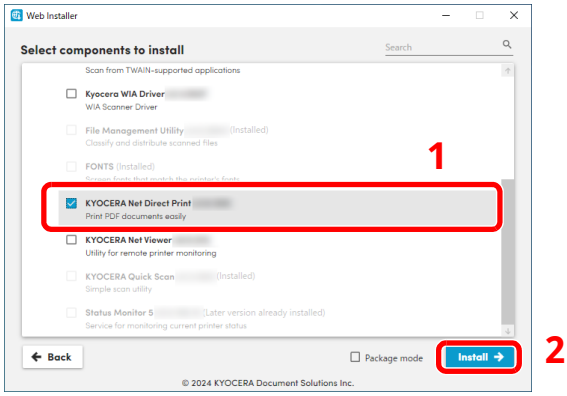


11 Click [Install].

When [Install] is clicked, a screen which asks for cooperation for data collection may appear. Select one of the answer choices and click [OK].

Note

- If the Windows security window appears, click [Install this driver software anyway].

12 Click [Next] > [Finish] to finish the installation wizard.

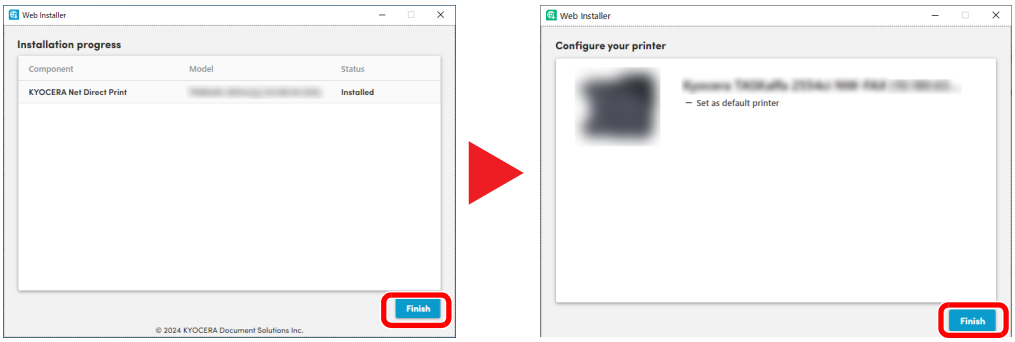

If a system restart message appears, restart the computer by following the screen prompts. This completes the fax driver installation procedure.

2.3. Install from DVD

Install KYOCERA Net Direct Print in your computer.

1 Insert the DVD.

Note

- Installation on Windows must be done by a user logged on with administrator privileges.
- If the “Welcome to the Found New Hardware Wizard” dialog box displays, select [**Cancel**].
- If the autorun screen is displayed, click [Run setup.exe].
- If the user account management window appears, click [**Yes**] ([**Allow**]).

2 Click [**View License Agreement**], read the License Agreement, and then Click [**Accept**].

3 Select [**Custom Install**].

4 Select the device to be installed.

5 Click [**Driver**] tab and select the **KX DRIVER**.

Note

- We recommend to install KX Printer Driver with KYOCERA Net Direct Print.

6 Click [**Utility**] tab and select the **KYOCERA Net Direct Print**.


7 Click [**Install**].

8 When “Your software is ready to use” appears, Click [**Finish**] to exit the wizard.

If a system restart message appears, restart the computer by following the screen prompts.

2.4. Startup


When the installation is completed, you can start the **KYOCERA Net Direct Print** by proceeding from the start menu > **All Programs** > **Kyocera** > **KYOCERA Net Direct Print**.

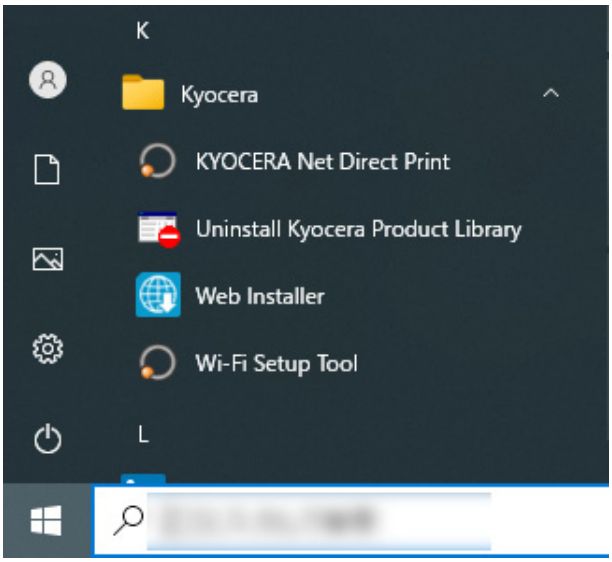

3. Printing PDF

Perform the following procedures below to print PDF file using **KYOCERA Net Direct Print**.

1 Start **KYOCERA Net Direct Print**.

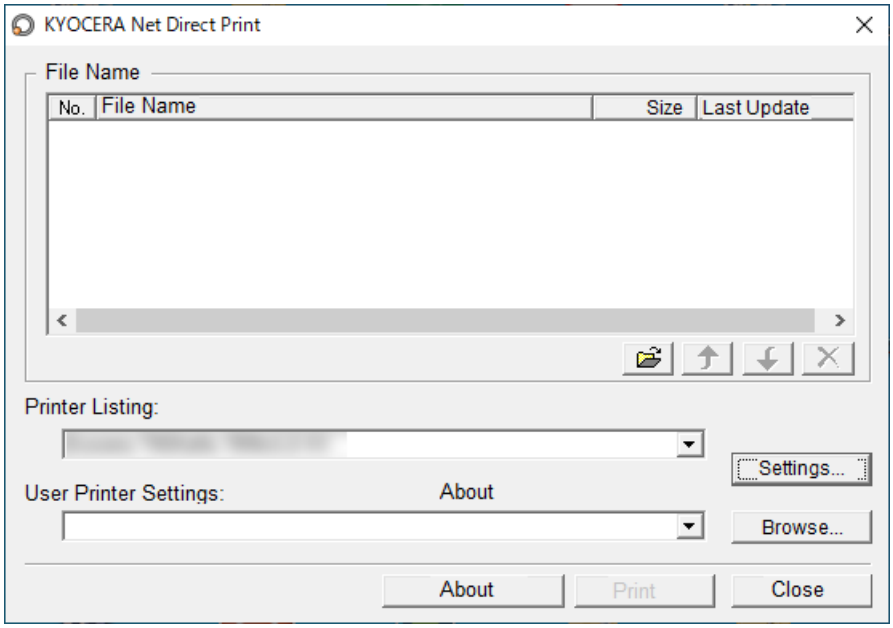

2 Add the desired PDF files to the **File Name** list by the following methods.

- Click the **Add** button to select files from the **Open File** dialog box.
- Select the file in Windows explorer and then drag and drop it to the icon for this application (including shortcut).
- Select the file in Windows explorer and then select **KYOCERA Net Direct Print** in the context menu.
- Select the file and then drag and drop it to this window.


3 Select the printing system to print PDF files from the **Printer Listing** pull-down menu.

4 Click the **Settings** button and make settings for printing. For details, refer to *Printing System Settings* on page 12.

Note
When you want to load the previously saved setting, select the setting file from the **User Printer Settings** pull-down menu or click the **Browse** button.

5 Click the **Detailed Settings** button and make the detailed settings such as page range for printing and media type. For details, refer to *Detailed Settings* on page 16.

6 Click the **Print** button. The **Confirmation** dialog box appears.

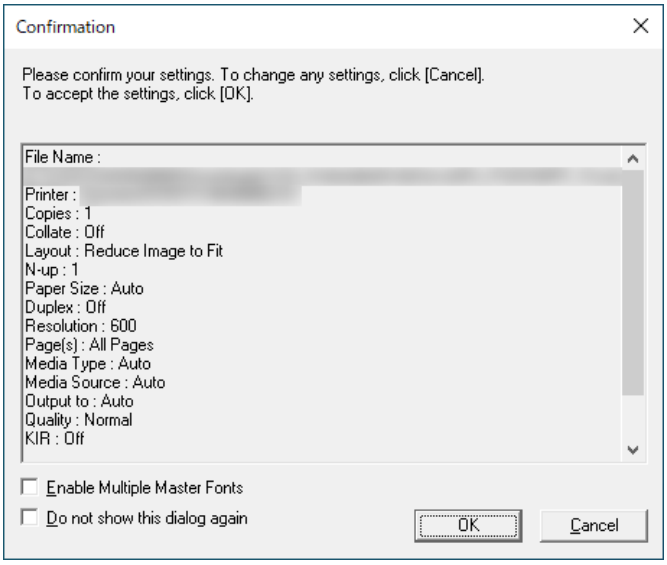


Notes

- Checking **Enable Multiple Master Font** and then clicking **OK** enable to generate a version of a character that is optically correct for the size at which it will be viewed on PDF file.
- Checking **Do not show this dialog again** and then clicking **OK** cannot be displayed the **Confirmation** dialog box.

7 When you want to continue printing, click **OK**.

4. Names and Functions


When you start this utility, the window below appears.

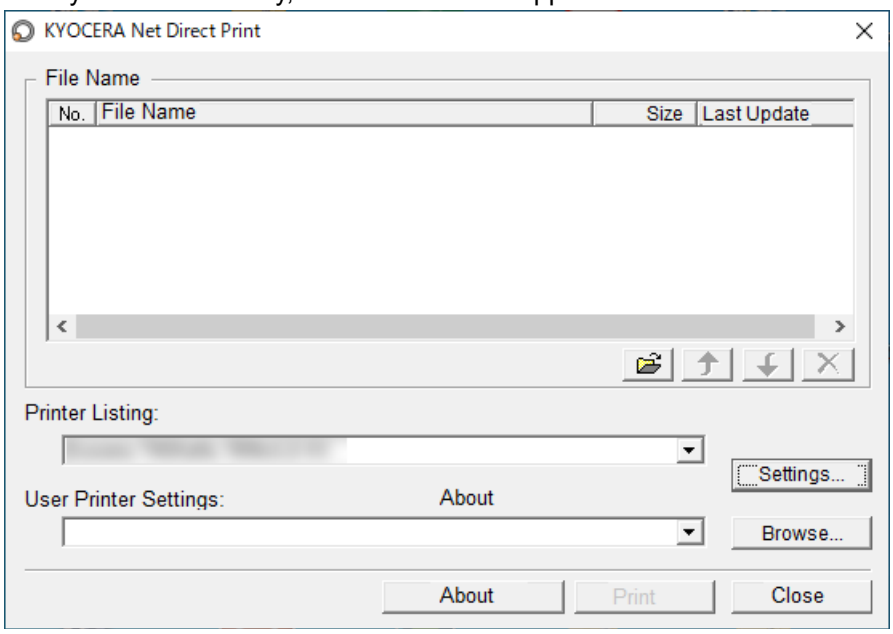

Name and Icon	Description
Add button	Displays the **Open File** dialog box. When you select a valid file, file name, file size and last update are displayed in the **File Name** list.
Up button **Down button**	Moves order of selected files up one or down one. **Note** You can also change the order by selecting a file and then dragging it to the order you want to change.
Delete button	Deletes the selected file from the list. **Note** You can also delete a file by selecting a file and then pressing the **Del** key on the keyboard.
Printer Listing	Displays the printing systems installed in the system. Select the output target printing system here.
Settings button	Displays the printing system setting dialog box.
User Printer Settings	Displays the names of setting files saved previously.
Browse button	Displays the **Open File** dialog box to load previously saved setting files.
About button	Displays the version and copyright of this utility.
Print button	Starts the printing process of the file displayed in the **File Name** list.
Close button	Exits this utility.

5. Printing System Settings

You can make frequently used settings as default.

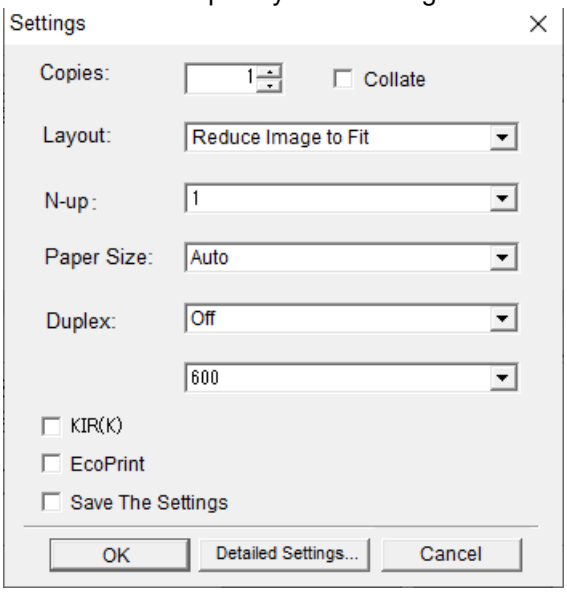

Copies Specifies the number of copies. The default setting is **1**.

Collate Produces the specified number of copies as complete sets of documents. The default setting is disabled (not checked).


Layout Specifies the layout of the output. The following layouts are available: **Reduce Image to Fit**, **Actual Size**, **Catalog (Left to Right)**, **Catalog (Right to Left)**, **Booklet (Left Edge Binding)** and **Booklet (Right Edge Binding)**. The default setting is **Reduce Image to Fit**.

When you select **Reduce Image to Fit**, the image is enlarged or reduced to fit the printing area of the paper specified in **Paper Size**.

When you select **Actual Size**, the image is printed in the same size as the original page regardless of paper size.


When you select **Catalog (Left to Right)**, **Catalog (Right to Left)**, **Booklet (Left Edge Binding)** or **Booklet (Right Edge Binding)**, the printing order is as follows.

• Catalog (Left to Right)

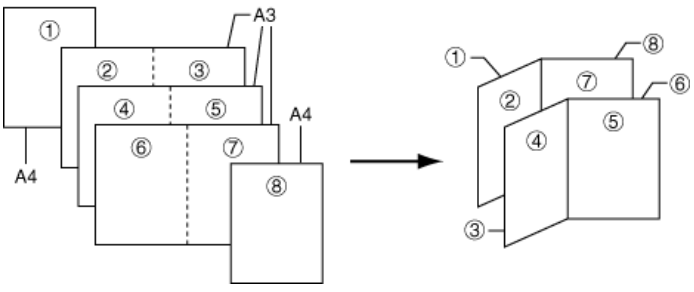

Original page order Printing result


• Catalog (Right to Left)

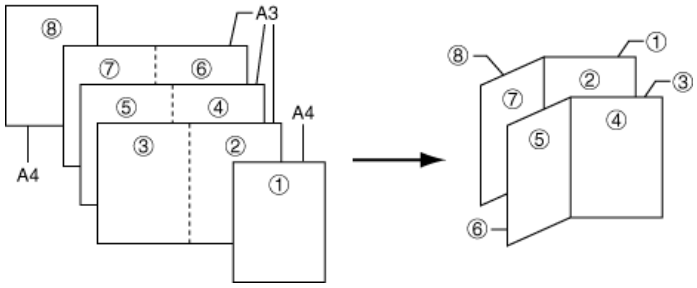

Original page order Printing result


Note
If the page order is not in the same order as shown above, the printing results will vary.

• Booklet (Left Edge Binding)

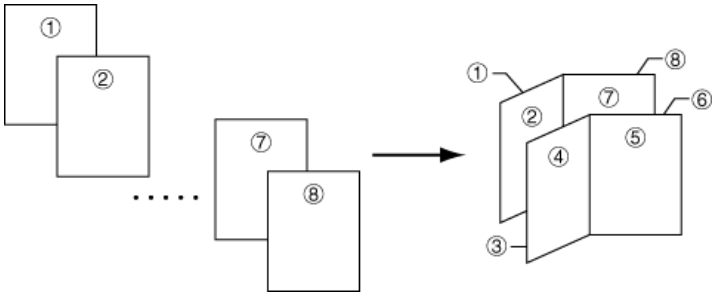

Original page order Printing result

• Booklet (Right Edge Binding)

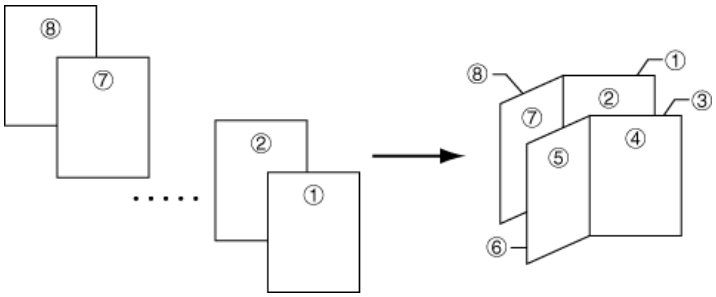

Original page order Printing result


Note
Confirm the paper size and load the paper into the cassette before printing. For example, to change the booklet configured in A4 portrait into the double spread page in A3 size, load the A3 size paper. If you load the A4 paper in landscape, a single side is reduced in A5 size, and the double spread pages in A4 are printed.


N-up

Specifies the number of pages per sheet. The following value is available: **1**, **2** and **4**. The default setting is 1.


When N-up settings 2 or 4 are used, the page layouts are as follows.


2-up





4-up





Note
If you select **Actual Size** in Layout, the value of N-up is fixed at 1 and cannot be changed. Furthermore, if you select Catalog or Booklet, the value is fixed at 2 and cannot be changed.

Paper Size

Specifies the paper size applied to the output. The following paper sizes are available:
12x18, **13 x 19.2**, **16K**, **216 x 340 mm**, **8K**, **A3**, **A4**, **A5**, **A6**, **Auto**, **B4**, **B5**, **B6**, **C4**, **Envelope #10**, **Envelope #6**, **Envelope #9**, **Envelope C5**, **Envelope DL**, **Envelope Monarch**, **Executive**, **Folio**, **Hagaki**, **ISO B5**, **Kaku 2**, **Ledger**, **Legal**, **Letter**, **Nagakaku 3**, **Oficio II**, **OufukuHagaki**, **SRA3**, **Statement**, **YoLong 3**, **Youkei 2** and **Youkei 4**. The default setting is **Auto**.

Duplex

Sets 2-sided printing. The following modes are available: **Off**, **Flip on Long Edge** and **Flip on Short Edge**. The default setting is **Off**.

Notes
If you select **Catalog** or **Booklet** in **Layout**, the value of **Duplex** is fixed at the **Flip on Short Edge** and cannot be changed.

This utility does not automatically recognize whether or not a duplex printing unit is present in a printing system. Therefore, there is a possibility that the duplex printing settings set here may be invalid.

Resolution

Specifies the printing resolution. The following resolutions are available: **300**, **600**, **Fast 1200** and **Fine 1200**. The default setting is **600**.


KIR

KIR (Kyocera Image Refinement) is a smoothing function that enhances resolution, resulting in high-quality printing. The default setting is disabled (not checked).

EcoPrint	Enables the printing system to reduce the amount of toner consumption to save printing costs. The default setting is disabled (not checked).
Save The Settings	Saves settings in a file. When checked, click **OK** to save the settings. You can select the saved file by **Load Setting File** in the main window. The default setting is disabled (not checked)
Detailed Settings	Displays another dialog box to perform more detailed settings. Information on using the **Detailed Settings** dialog box can be found on the following page

6. Detailed Settings

You can make select media type, media source and other detailed settings in this dialog box.

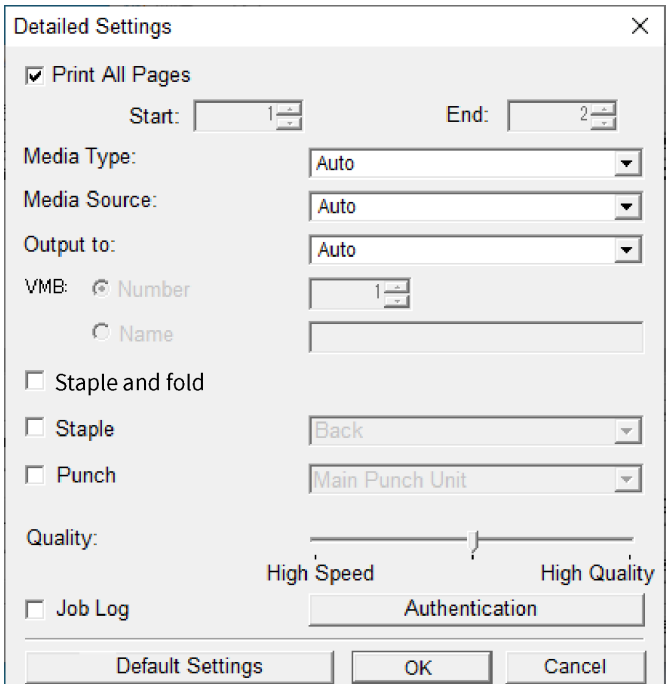

Print All Pages — Check to print all pages.

If you remove this check, the range entry boxes are active. Specify the page range for printing.

Note
If you select **Catalog** in **Layout** of the **Settings** dialog box, **Print All Pages** is automatically checked and cannot be changed.

Media Type — Selects the media type used for printing. The following media types are available: **Unspecified**, **Auto**, **Plain**, **Transparency**, **Preprinted**, **Labels**, **Bond**, **Recycled**, **Vellum**, **Rough**, **Letterhead**, **Color**, **Prepunched**, **Envelope**, **Cardstock**, **Coated**, **2nd Side**, **Thick**, **High Quality**, **Inkjet paper**, **Inkjet Matte Paper**, **Thin Paper**, and **Custom 1** (to **8**). The default setting is **Auto**.

Media Source — Specifies the paper supply cassette. The following media sources are available: **Auto**, **Multi Purpose Tray**, **Cassette1**, **Cassette2**, **Cassette3**, **Cassette4**, **Cassette5**, **Cassette6**, **Cassette7**, **Cassette8**, **Optional MP Tray** and **Envelope Feeder**. The default setting is **Auto**.

Note
The setting may be ignored depending on the configuration of the printing system.

Output to

Specifies the paper output destination.The following destinations are available: **Auto**, **Face Up Tray**, **Face Down Tray**, **Finisher Tray (Face Down)** and **VMB**. The default setting is **Auto**.

Note
The setting may be ignored depending on the configuration of the printing system.

VMB
(Virtual MailBox)

This is active when **VMB** is specified as the **Output to** destination above. **Virtual Mailbox** feature, mailboxes created on the hard disk are assigned to multiple users. Jobs posted to a virtual mailbox can be printed later from the operation panel of the printing system.

Number: specifies the mailbox by the number. the number should be 1 to 255.

Name: specifies the mailbox by the name.

Note
The setting may be ignored depending on the configuration of the printing system.

Staple and fold

Prints, staples, and folds the booklet. The default setting is disabled (not checked).

Staple

Staples each copy set. The default setting is disabled (not checked).

When this item is enabled, the combo box is active allowing you to select that result. The following staple positions are available: **Back**, **Booklet** and **Front**.

Punch

Makes copies hole punched. The default setting is disabled (not checked).

When this item is enabled, the combo box is active allowing you to select that result. The following value are available: **Main Punch Unit** and **Sub Punch Unit**.

Note
The setting may be ignored depending on the configuration of the printing system.

PDF Password

Enter the password required to print encrypted PDF files. The password should be 32 characters maximum.

Quality

You can choose the printing quality, from **High Quality** to **High Speed**. Move the slider to the left to select a **High Speed** or to the right to select a **High Quality**. The default setting is center.

Note
The setting is enabled only when the PDF file to print is PDF version 1.4 or later file and using Transparency Flattenering function. Otherwise the setting is ignored.

PDF version can be confirmed on the window displayed by which selecting from File menu > Document Properties > Summary.

Transparency Flattenering function can be confimed on the Advanced Print Setup dialog box.


Job Log

Maintains a log in the system that indicates printed PDF files and the date/time of printing. Entering a check mark for this item enables the Job Log.

For details on the Job Log, refer to the Operation Guide of the printing system.

Authentication

Displays **Authentication** dialog box.

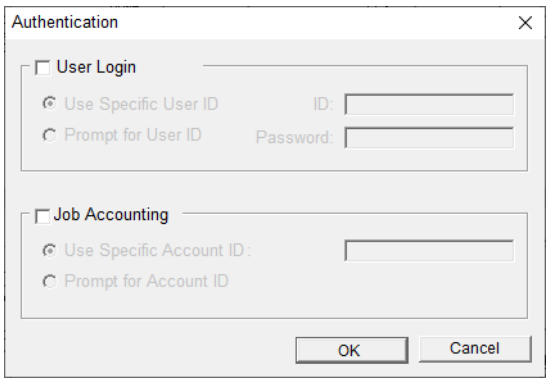

User Login

To use user login function, click **User Login** to check. For details on user login function, refer to *Operation Guide* of the printing system. Select **Use Specific User ID** when always printing with same ID. Select **Prompt for User ID** when printing with several different IDs. This prompt you to enter the **User ID** and **Password** at each time you print on the printing system.

Job Accounting

To use job accounting function, click Job Accounting to check. For details on job accounting, refer to *Operation Guide* of the printing system. Select **Use Specific Account ID** when always printing with same ID. Select **Prompt for Account ID** when printing with several different IDs. This prompt you to enter the **Account ID** at each time you print on the printing system.

Default Settings

Returns all settings to their initial state.

For the Kyocera contact in your region, see Sales Sites sections here.
https://www.kyoceradocumentsolutions.com/company/directory.html

©2025 KYOCERA Document Solutions Inc.
The Kyocera logo is a trademark of Kyocera Corporation.